





**P 9 S**

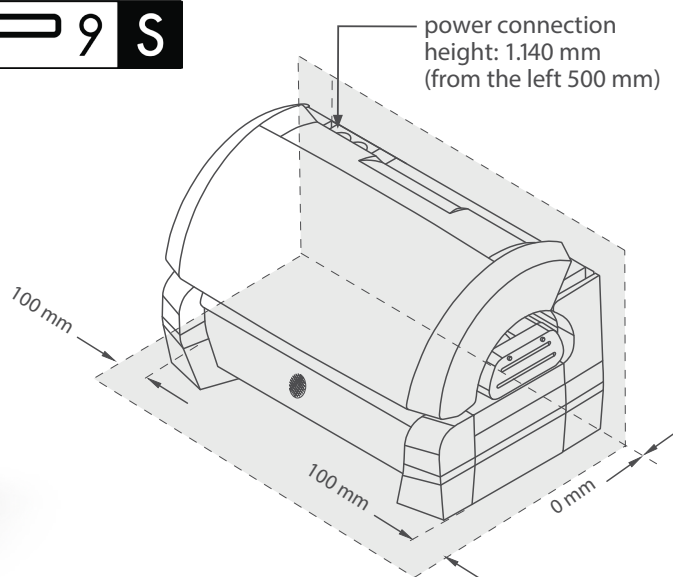


Maximum power consumption	12,5 kW
Weight	ca. 785 kg (with air condition)
Bed pane max. load capacity	max. 150 kg

#### Electrical connection values

Main voltage	400 V / ~3N / 50 Hz
Breaker	Automatic fuse K-type (safety cut-out), 3-pole, 3 x 25A with residual current operated circuit breaker (RCD)

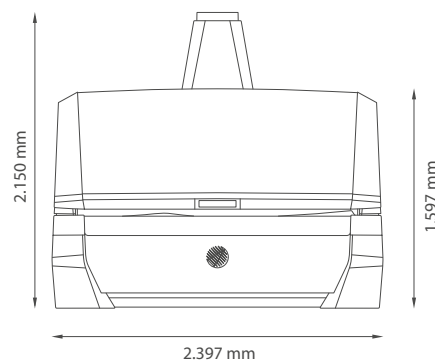

Ambient conditions	In dry rooms (booths) with sufficient airing and ventilation
Recommended room size:	2.600 mm (Width) x 2.300 mm (Depth)
Maximum relative air humidity:	70%
Maximum room temperature:	30°C
Minimal distance to side walls:	100 mm
Minimum room height:	2.400 mm
Distance to backwall:	0 mm

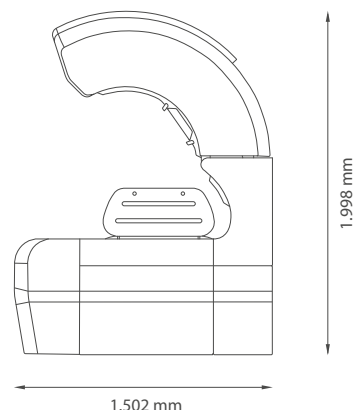

#### Dimensions (mm)    Length x Width x Height

Closed:	2.397 mm x 1.502 mm x 1.597 mm (2.150 mm h with exhaust)
Open:	2.397 mm x 1.502 mm x 1.998 mm (2.150 mm h with exhaust)